



KH7220

Mechanical Refrigeration Chamber



Features

- Stability : $\pm 0.1^{\circ}\text{C}$ (* note)
- Uniformity : $\pm 0.3^{\circ}\text{C}$ (at component area) (* note)
- Temperature range : -50°C to $+150^{\circ}\text{C}$ (-60°C can be upon request)
- Power : 3 phase, AC 380V, 7 KVA typical (depending on temperature).
- Coolant : Mechanical refrigeration (Water-cooled or Air-cooled type)
- Control Panel : Touch Panel LCD Display, allows temperature setting.
- Remote Operation : RS232C port.

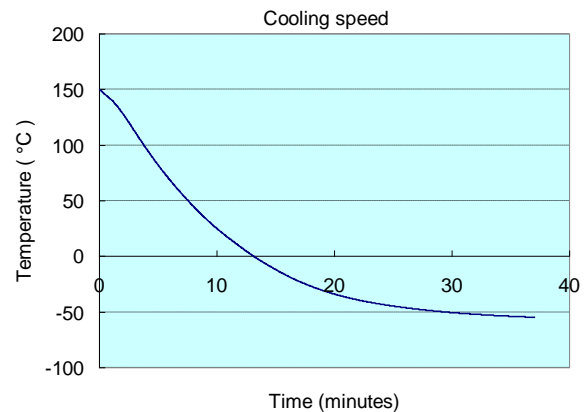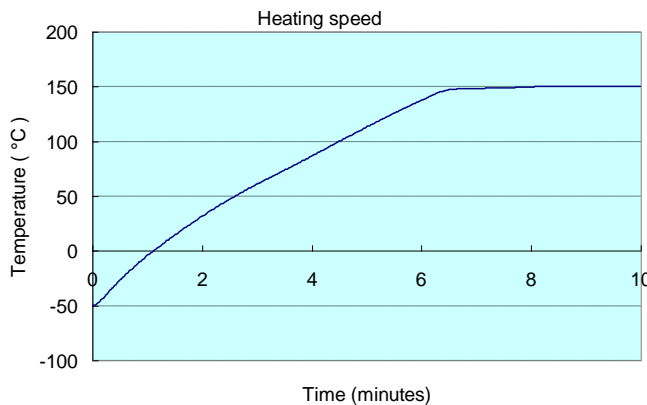

(* Note: Specifications are valid for the chamber equipped with a 4" cover, a component support wheel and a dual row crystal test wheel.)

Specifications are subject to change without prior notice.
Photo shown is for reference only.



Kolinker Precision Technology Limited

Member of Kolinker Group

Unit C, 24/F., Shield Industrial Centre, 84 - 92 Chai Wan Kok Street, Tsuen Wan, N.T., Hong Kong

Tel: (852) 3511 2388

Fax: (852) 35112300

E-mail: kolinker@kolinker.com

Home page: <https://www.kolinker.com>

